

# MASTER GLASS LED candles and lusters



## MAS LEDCandleDT3.4-40W B22 927 B35CL G

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of incandescent candles and lusters with the benefits of the long-lasting LED technology. It is an idea product to provide customers with cozy atmosphere. The MASTER LED candles and lusters can be dimmed for different lumen level and also for the different color temperature. MASTER Glass Led Bulbs deliver significant energy savings, offering even 30% more compared to normal LED and provides excellent quality of light. By offering a lifetime of 25,000 hours it reduces maintenance costs.

### Product data


General Information		Flickering value (PstLM) - Flickering value as 0.9 per EN 61000-3-3	
Cap-Base	B22	Stroboscopic effect visibility measure (SVM)	0.4
Nominal lifetime	25,000 hour(s)	Photobiological safety according to EN 62471	RG0
Switching Cycle	20,000	Operating and Electrical	
Lighting Technology	LED	Line Frequency	50 to 60 Hz
Flux measurement reference	Sphere	Input Frequency	50 to 60 Hz
EU RoHS compliant	Yes	Power Consumption	3.4 W
Light Technical		Lamp Current (Nom)	24 mA
Color Code	922-927 [CCT of 2200K-2700K]	Wattage Equivalent	40 W
Luminous Flux	470 lm	Starting Time (Nom)	0.5 s
Color Designation	Warm Glow(WG)	Warm-up time to 60% light	0.5 s
Correlated Color Temperature (Nom)	2200 2700 K	Power Factor (Fraction)	0.6
Luminous Efficacy (rated) (Nom)	138 lm/W	Voltage (Nom)	220-240 V
Color Consistency	<6		
Color rendering index (CRI)	90		
LLMF At End Of Nominal Lifetime (Nom)	70 %		

# MASTER GLASS LED candles and lusters

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	B35
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1109141



EyeComfort	Yes
Product Data	
Order product name	MAS LEDCandleDT3.4-40W B22 927 B35CL G
Full product name	MAS LEDCandleDT3.4-40W B22 927 B35CL G
Full product code	871951444945900
Order code	929003012482
Material Nr. (12NC)	929003012482
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514449459
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514449466

## Dimensional drawing



Product	D	C
MAS LEDCandleDT3.4-40W B22 927 B35CL G	35 mm	94 mm

## Photometric data

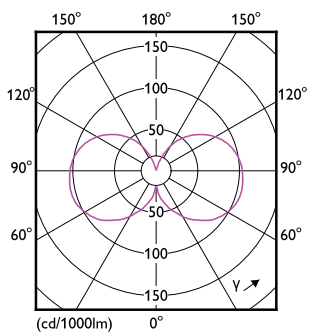


Light Distribution Diagram - MAS LEDCandleDT3.4-40W B22 927 B35CL G

General uniform lighting - MAS LEDCandleDT3.4-40W B22 927 B35CL G

# MASTER GLASS LED candles and lusters

## Photometric data

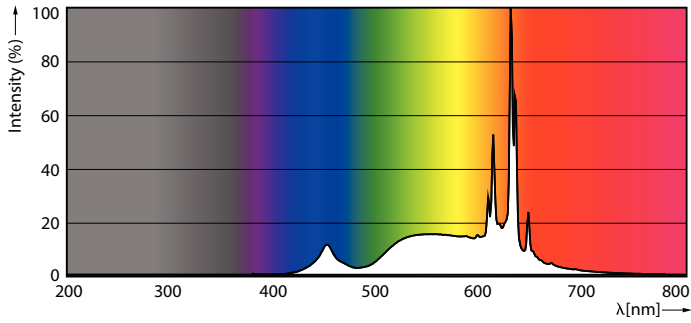

Spectral Power Distribution Colour - MAS LEDCandleDT3.4-40W B22 927 B35CL G

## Lifetime



Life Expectancy Diagram - MAS LEDCandleDT3.4-40W B22 927 B35CL G



Lumen Maintenance Diagram - MAS LEDCandleDT3.4-40W B22 927 B35CL G

