



# MASTER LEDspot MV

MASTER LEDspotMV D 4-35W GU10 830 40D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

## Product data

### • General Characteristics

Cap-Base	GU10
Bulb	PAR16 [PAR 2inch]
Rated Lifetime (hours)	40000 hr
Rated Lifetime (years)	25 an
Nominal Lifetime hours	40000 hr

### • Light Technical Characteristics

Colour Code	830
Colour Designation	White
Beam Angle	40 D
Correlated Colour Temperature	3000 K
Luminous Flux	275 Lm
Luminous Intensity	600 cd
Colour rendering index	80
Luminous Efficacy Lamp	70.00 Lm/W
Colour Temperature	3000 K [CCT 3000K]
Rated Luminous Flux	275 Lm
LLMF - end nominal lifetime	70 %
Colour consistency	6 steps
Rated Beam Angle	40 D
Luminous flux in 90° cone	250 Lm

### • Electrical Characteristics

Wattage	4 W
Wattage Technical	4 W
Voltage	220-240 V

Line Frequency	50-60 Hz
Power Factor	0.6 -
Lamp Current mA	28 mA
Dimmable	Yes
Wattage Equivalent	35 W
Rated Wattage	4.0 W
Starting Time	0.1 (max) s
Warm-up Time to 60% Light Outp	instant full light
Suitable for accent lighting	Yes

### • Temperature Characteristics

T-case maximum	85 C
----------------	------

### • Environmental characteristics

Energy Efficiency Label (EEL)	A+
-------------------------------	----

### • Measuring Conditions

Switching cycle	50000x
-----------------	--------

### • Product Dimensions

Overall Length C	55 mm
Diameter D	50 mm

### • Product Data

Order code	697084 00
Full product code	871829169708400
Full product name	MASTER LEDspotMV D 4-35W GU10 830 40D



**PHILIPS**

# MASTER LEDspot MV

Order product name MAS LEDspotMV D 4-35W GU10  
830 40D  
Pieces per pack 1  
Packing configuration 10  
Packs per outerbox 10  
Bar code on pack - EAN1 8718291697084


Bar code on outerbox - EAN3 8718291697091  
Logistic code(s) - 12NC 929000256302  
Net weight per piece 0.038 kg

## Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient


- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

## Dimensional drawing

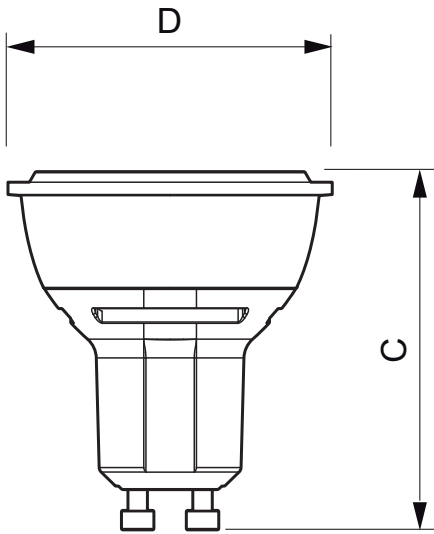


### MASTER LEDspotMV D 4-35W GU10 830 40D

Product	C (Norm)	C1 (Max)	D (Norm)	D1 (Norm)
LED D 4-35W GU10 830 40D	55	-	50	-



GU10

## Photometric data

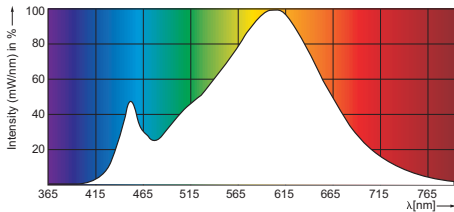

4-35W GU10 /830



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, February 18  
data subject to change