

IP65 12/16W LED

CCT ADJUSTABLE DUAL WATTAGE POLO BULKHEAD

SKU:S18432

INFORMATION

Often used in industrial and commercial premises to illuminate outdoor and large indoor areas, bulkhead lights are robust and durable, offering high ingress protection from dust and moisture.

Motion activated models turn on when they sense movement, and LED bulkheads are effective as a continual light source due to their low energy consumption. Light emitting diodes use up to 90% less energy than traditional lights and they have a longer lifespan so need changing less often.

FEATURES

- Lumens: 1,200 / 1,600lm*
- Lumens Per Watt: 88~100*
- CCT: 3000/4000K/6500K
- Beam Angle: 115 Degrees
- Life span: 30,000Hrs
- IP Rating: IP65
- IK Rating: IK08
- UK, CE & RoHS Compliant
- Quick Fit Push Terminal
- Flicker Free

*Approximate Measurement

TECHNICAL PARAMETER


- Input: AC 220-240V
- Driver: Lifud DC 25-38V
- LED Type: SMD
- Output Power: 12/16W
- Base Material: ABS
- Diffuser Material: Polycarbonate
- CRI: >80
- PF: 0.8
- Class: Class I
- Flicker Free
- Working Temp: -30°C ~+50°C

APPLICATIONS

- Hotels
- Conference/Meeting rooms
- Factories and offices
- Schools, colleges, universities and hospitals




LUMiLiFe is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LUMiLiFe cannot accept any liability arising from the reliance on such data to the extent permitted by law.

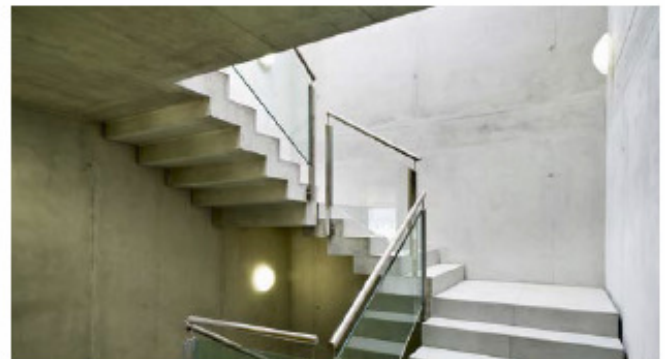

SPECIFICATIONS

Model#	CCT	LED Type	Lumen (Lm) ($\pm 5\%$)	CRI	Beam Angle	Wattage	Voltage	PF
S18432	3,000/4,000/6,500K	SMD	1,200 / 1,600Lm	>80	115°	12/16W	AC220-240V	>0.8

DIMENSIONS (mm)

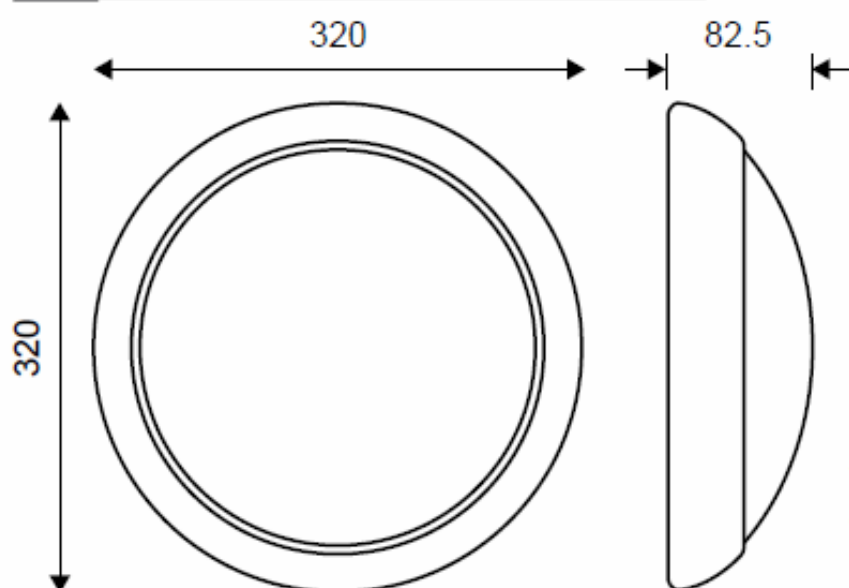

All dimension tolerances are ± 0.5 mm unless otherwise stated.

SENSORED LINES as per S18432 plus

Model#	Sensor Option	Wattage
S18434	Emergency Sensor	13.5/17.5W
S18436	Microwave & Corridor Sensor	12/16W
S18437	Microwave, Emergency & Corridor Sensor	13.5/17.5W

Emergency models: 3 hours emergency period at 100 lumens. Battery = Lithium Battery 3.7V 3,000mAh