

LED Non-corrosive




Product features:

- 4FT / 5FT / 6FT, single & twin options
- High quality Philips driver
- Full IP65 construction
- Emergency Plug & Play kit: Self-test
- CRI>80
- Up to 129lm/W efficacy
- Stainless steel clips

Item	Part Number	12NC	Wattage	Lumens	Efficacy	CCT
ECOLINK NCF 4FT SINGLE 840	ECONC4FT-S-4K	911401821087	22W	2400lm	109lm/W	4000K
ECOLINK NCF 4FT TWIN 840	ECONC4FT-T-4K	911401820987	44W	4800lm	109lm/W	4000K
ECOLINK NCF 5FT SINGLE 840	ECONC5FT-S-4K	911401820887	31W	3500lm	113lm/W	4000K
ECOLINK NCF 5FT TWIN 840	ECONC5FT-T-4K	911401820787	53W	6800lm	128lm/W	4000K
ECOLINK NCF 6FT SINGLE 840	ECONC6FT-S-4K	911401821287	44W	4400lm	100lm/W	4000K
ECOLINK NCF 6FT TWIN 840	ECONC6FT-T-4K	911401821187	65W	8400lm	129lm/W	4000K
EM PACK FOR BATTEN/NCF 3HR SELF-TEST	ECO-E3/ST-NC/BT	912401483460	-	280lm	-	-

Dimensions:

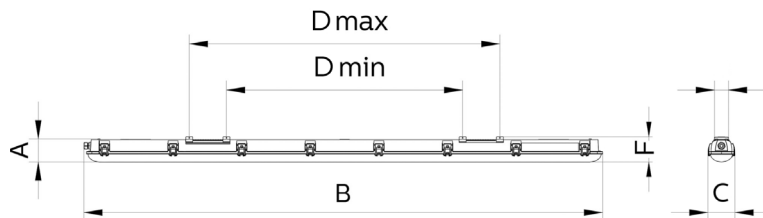

Item	Part Number	A	B	C	D min	D max	F
ECOLINK NCF 4FT SINGLE 840	4ft single	74	1207	71	630	910	74
ECOLINK NCF 4FT TWIN 840	4ft twin	74	1207	71	630	910	74
ECOLINK NCF 5FT SINGLE 840	5ft single	74	1507	71	910	1190	74
ECOLINK NCF 5FT TWIN 840	5ft twin	74	1507	71	910	1190	74
ECOLINK NCF 6FT SINGLE 840	6ft single	83	1870	97	851	1120	90
ECOLINK NCF 6FT TWIN 840	6ft twin	83	1870	97	851	1120	90
EM PACK FOR BATTEN/NCF 3HR SELF-TEST	ECO-E3/ST-NC/BT						